

# PHOTOCOUPLER, PHOTOCOUPLER ARRAY AND PHOTOELECTRIC SENSOR


**Patent number:** JP6085314  
**Publication date:** 1994-03-25  
**Inventor:** NAKAMURA ARATA; HORIE NORISADA; TAKAGI JUNICHI; TANAKA TSUGUJI; KITAGAWA YUKINORI  
**Applicant:** OMRON TATEISI ELECTRONICS CO  
**Classification:**  
- international: G02B6/42; H01L31/12; H01L33/00; G02B6/42; H01L31/12; H01L33/00; (IPC1-7): H01L31/12; G02B6/42; H01L33/00  
- european:  
**Application number:** JP19930169566 19930615  
**Priority number(s):** JP19930169566 19930615; JP19920183076 19920616

Report a data error here

## Abstract of JP6085314

**PURPOSE:** To provide a photocoupler which has a high coupling efficiency between a light emitting element and optical fiber by correcting the aberration of the optical system.

**CONSTITUTION:** The light projection side of a transparent resin package 5 wherein a light emitting chip 3 is sealed is formed into an almost hemispheric shape. A metal evaporation film 6 is formed thereon to obtain a concave reflecting surface 7. A focusing non-spheric lens surface 8 whose curvature is smaller in the peripheral area than in proximity to the center of the optical axis, is formed on the opposite face of the transparent resin package 5. The end of an optical fiber 2 is allowed to face the non-spheric lens surface 8 of the transparent package 5 with a space 9 placed between them. Light projected from the light emitting chip 3 is reflected by the concave reflecting surface 7. After its comatic aberration is corrected, the light passes through the space 9, and then it is focused on the end of the optical fiber 2.

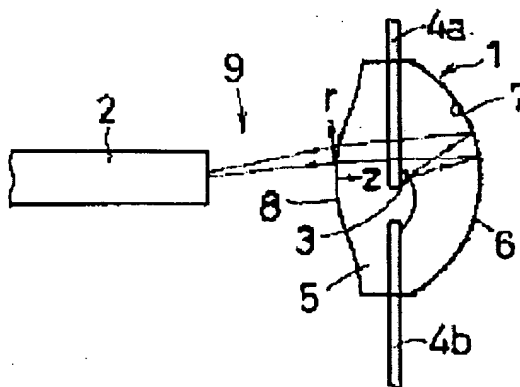

Data supplied from the *esp@cenet* database - Worldwide

**BEST AVAILABLE COPY**